



Position Drill



■ 定位鑽

600
NanoHRC
▶ 45

● Micro Grain Carbide

● WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6μm

MODE	Diameter	Flute Length	Full Length	Shank Diameter	Tip Angle
型號	d 刃徑	l 刃長	L 全長	D 柄徑	A 前端角
PDST030900	3	10	50	3	90°
PDST030120	3	10	50	3	120°
PDST040900	4	12	50	4	90°
PDST040120	4	12	50	4	120°
PDST050900	5	15	50	5	90°
PDST050120	5	15	50	5	120°
PDST060900	6	20	60	6	90°
PDST060120	6	20	60	6	120°
PDST080900	8	25	60	8	90°
PDST080120	8	25	60	8	120°
PDST100900	10	25	75	10	90°
PDST100120	10	25	75	10	120°
PDST120900	12	30	75	12	90°
PDST120120	12	30	75	12	120°
PDST160900	16	35	100	16	90°
PDST160120	16	35	100	16	120°
PDST200900	20	40	100	20	90°
PDST200120	20	40	100	20	120°

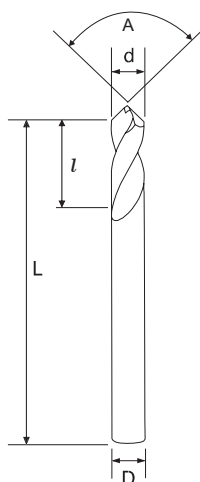

Application 適用材質：

◎ Recommend 最適合 ○ Suitable 適合 X Not Recommend 不建議

carbon steel, Alloy steel 炭素鋼, 合金鋼	Pre-hardened steel 預硬鋼	High-hardened 高硬度鋼				Stainless steel 不銹鋼	Copper alloy 銅合金, 銅	Aluminum alloy 鋁合金
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
○	◎	○					○	○