

Cutting Condition
P435-440

Square Type - 2 flutes

■ 2刃立銑刀

600
Nano

HRC
▶ 55

35°

ALTIBN

● Micro Grain Carbide


● WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6μm

FRACTIONAL 英制



MODE 型號	Diameter	Flute Length	Full Length	Shank Diameter	Flutes
	d 直徑	l 刃長	L 全長	D 柄徑	Z 刃數
ISE1/16"2T	1/16	3/16	1-1/2	1/8	2
ISE5/64"2T	5/64	3/16	1-1/2	1/8	2
ISE3/32"2T	3/32	9/32	1-1/2	1/8	2
ISE7/64"2T	7/64	3/8	1-1/2	1/8	2
ISE1/8"2T	1/8	3/8	1-1/2	1/8	2
ISE3/16"2T	3/16	5/8	2	3/16	2
ISE1/4"2T	1/4	3/4	2-1/2	1/4	2
ISE5/16"2T	5/16	13/16	2-1/2	5/16	2
ISE3/8"2T	3/8	1	2-1/2	3/8	2
ISE1/2"2T	1/2	1	3	1/2	2
ISE5/8"2T	5/8	1-1/4	3-1/2	5/8	2

Unit:inch

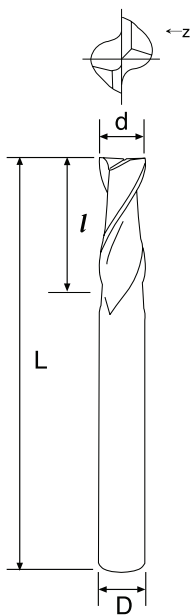

- HRC ▶ 40
- HRC ▶ 45
- HRC ▶ 50
- HRC ▶ 55
- HRC ▶ 60
- HRC ▶ 65
- ☐
- ⊕
- ⊖
- ⊗
- ⊙
- ⊚
- ⊛
- ⊜
- ⊝
- ⊞
- ⊟
- ⊠
- ⊡
- ⊢
- ⊣
- ⊤
- ⊥
- ⊦
- ⊧
- ⊨
- ⊩
- ⊪
- ⊫
- ⊬
- ⊭
- ⊮
- ⊯
- ⊰
- ⊱
- ⊲
- ⊳
- ⊴
- ⊵
- ⊶
- ⊷
- ⊸
- ⊹
- ⊺
- ⊻
- ⊼
- ⊽
- ⊾
- ⊿

Application 適用材質:

★ Perfect 最推薦 ◎ Excellent 適合 ○ Good 佳

carbon steel, Alloy steel 炭素鋼,合金鋼	Pre-harden steel 預硬鋼	High-hardened 高硬度鋼				Stainless steel 不銹鋼	Copper alloy 銅合金,銅	Aluminum alloy 鋁合金
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
◎	◎	◎	○			○		