

Position Drill

■ 定位鑽





● Micro Grain Carbide

● WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6μm



MODE	Diameter	Flute Length	Full Length	Shank Diameter	Tip Angle
型號	d 刃徑	l 刃長	L 全長	D 柄徑	A 前端角
PDST030900 T	3	10	50	3	90°
PDST030120 T	3	10	50	3	120°
PDST040900 T	4	12	50	4	90°
PDST040120 T	4	12	50	4	120°
PDST050900 T	5	15	50	5	90°
PDST050120 T	5	15	50	5	120°
PDST060900 T	6	20	60	6	90°
PDST060120 T	6	20	60	6	120°
PDST080900 T	8	25	60	8	90°
PDST080120 T	8	25	60	8	120°
PDST100900 T	10	25	75	10	90°
PDST100120 T	10	25	75	10	120°
PDST120900 T	12	30	75	12	90°
PDST120120 T	12	30	75	12	120°
PDST160900 T	16	35	100	16	90°
PDST160120 T	16	35	100	16	120°
PDST200900 T	20	40	100	20	90°
PDST200120 T	20	40	100	20	120°

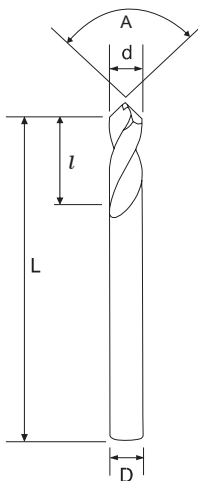

Application 適用材質：

◎ Recommend 最適合 ○ Suitable 適合 X Not Recommend 不建議

carbon steel, Alloy steel 炭素鋼, 合金鋼	Pre-hardened steel 預硬鋼	High-hardened 高硬度鋼				Stainless steel 不銹鋼	Copper alloy 銅合金, 銅	Aluminum alloy 鋁合金
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
◎	◎	◎	○			○		

